



22823

- Even fading pattern without hotspots
- Water tight configuration to withstand the severe applications
- 70% of raw lumen emission without compromising thermo management
- Compact size 105mm x 105mm
- Low power consumption

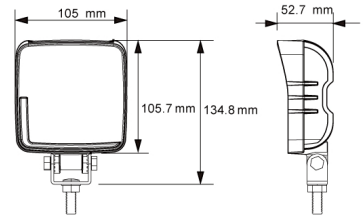

Virtual Reality

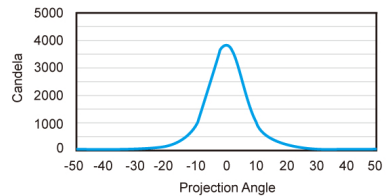

Specs		Material		Resistant	
Voltage	12~36V	Current Draw	13.5Vat 0.64A±0.10A	Lens	PC
Flood	✓		28Vat 0.35A±0.06A	Housing	aluminum
SMD high power LEDs	4	Connection	300 mm cable	Bracket	stainless steel
Watt	9.8	Weight	430g	Hardware	stainless steel
Raw lumen	960	Std pack qty	20		Water
Effective lumen	670				Dust
HV CD	3733				Shock
					Warpage
					Temperature
					-30°C~50°C